


MAXIMIZE PRODUCTIVITY. MINIMIZE WEIGHT.

**EPIBOND® 215 A/B
structural adhesive can
replace up to five
competitive adhesives
and is 75% lighter than
mechanical fasteners.**

To maximize fuel efficiency, lighter is always better. And to improve productivity, using a single adhesive across multiple applications means assembly tasks are completed faster, and ongoing maintenance is kept to a minimum.

With up to 45% better peel, shear and compressive performance than many other structural adhesives, EPIBOND® 215 A/B adhesive can reduce Stock Keeping Units (SKUs) by 80% and help to lower fuel consumption by replacing metallic bolts and screws with a 75% lighter solution.

The superior performance of EPIBOND® 215 A/B adhesive helps to lengthen the lifetime of assembled parts by reducing maintenance requirements. It also provides a better, more reliable alternative to mechanical fasteners, which can reduce the base substrate tensile strength by up to 50%.

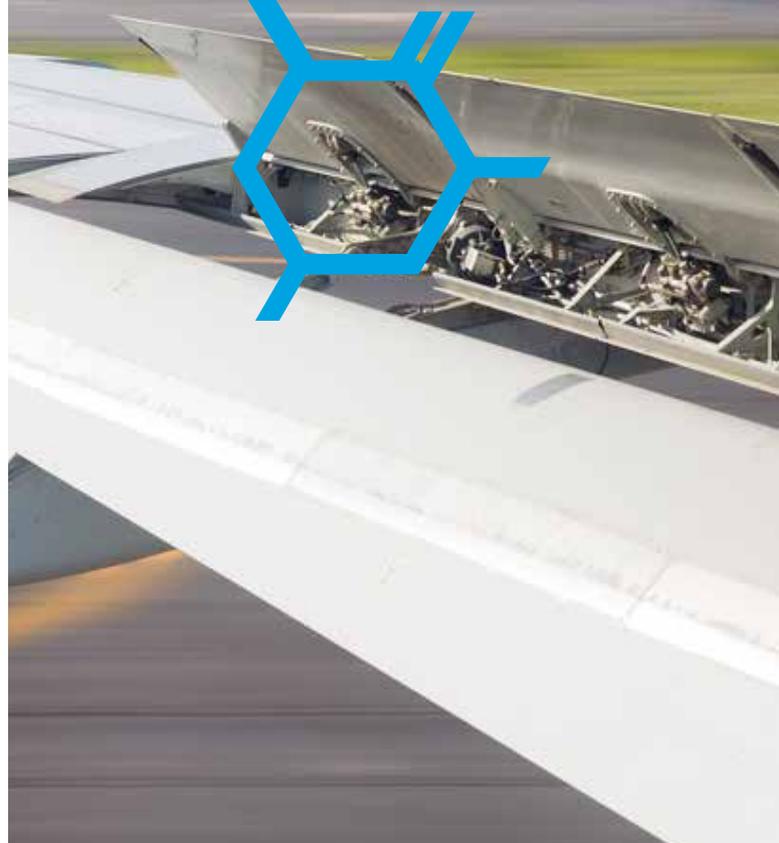

WHAT MAKES EPIBOND® 215 A/B STRUCTURAL ADHESIVE DIFFERENT?

EPIBOND® 215 A/B adhesive is an extrudable, two-component, room-temperature curing epoxy structural adhesive for bonding a wide variety of materials in many high-stress applications.

SUPERIOR PERFORMANCE

71 pli/
12 N/mm
High peel strength

7400 psi/
51 MPa
Compressive strength

5400 psi/
37 MPa
Lap shear strength

↑ 45%
Up to 45% better mechanical performance compared to competing structural adhesives

↑ 250°F/120°C

Designed for service temperatures of up to 250°F/120°C



LOWER WEIGHT

↓ 75%

Up to 75% lighter than traditional aluminum screw and bolt fasteners

DESIGNED FOR PRODUCTIVITY

↓ 80%

Up to 80% reduction in adhesive stock keeping units



Saves time in assembly operations

LESS MAINTENANCE



Improved end-product lifetime

For more information:
www.aralditeadhesives.com

Legal information

All trademarks mentioned are either property of or licensed to Huntsman Corporation or an affiliate thereof in one or more, but not all, countries. Sales of the product described herein ("Product") are subject to the general terms and conditions of sale of either Huntsman Advanced Materials LLC, or its appropriate affiliate including without limitation Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., or Huntsman Advanced Materials (Hong Kong) Ltd. or Huntsman Advanced Materials (Guangdong) Ltd. ("Huntsman"). The following supersedes Buyer's documents. While the information and recommendations included in this publication are, to the best of Huntsman's knowledge, accurate as of the date of publication, NOTHING CONTAINED HEREIN IS TO BE CONSTRUED AS A REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS, OR WARRANTIES AS TO QUALITY OR CORRESPONDENCE WITH PRIOR DESCRIPTION OR SAMPLE, AND THE BUYER ASSUMES ALL RISK AND LIABILITY WHATSOEVER RESULTING FROM THE USE OF SUCH PRODUCT, WHETHER USED SINGLY OR IN COMBINATION WITH OTHER SUBSTANCES. No statements or recommendations made herein are to be construed as a representation about the suitability of any Product for the particular application of Buyer or user or as an inducement to infringe any patent or other intellectual property right. Data and results are based on controlled conditions and/or lab work. Buyer is responsible to determine the applicability of such information and recommendations and the suitability of any Product for its own particular purpose, and to ensure that its intended use of the Product does not infringe any intellectual property rights. The Product may be or become hazardous. Buyer should (i) obtain Material Safety Data Sheets and Technical Data Sheets from Huntsman containing detailed information on Product hazards and toxicity, together with proper shipping, handling and storage procedures for the Product, (ii) take all steps necessary to adequately inform, warn and familiarize its employees, agents, direct and in direct customers and contractors who may handle or be exposed to the Product of all hazards pertaining to and proper procedures for safe handling, use, storage, transportation and disposal of and exposure to the Product and (iii) comply with and ensure that its employees, agents, direct and indirect customers and contractors who may handle or be exposed to the Product comply with all safety information contained in the applicable Material Safety Data Sheets, Technical Data Sheets or other instructions provided by Huntsman and all applicable laws, regulations and standards relating to the handling, use, storage, distribution and disposal of and exposure to the Product. Please note that products may differ from country to country. If you have any queries, kindly contact your local Huntsman representative.

EPIBOND® is a trademark of Huntsman Corporation or an affiliate thereof in one or more, but not all, countries.
© 2019 Huntsman Corporation. All rights reserved.

Americas

Huntsman Advanced Materials
Americas Inc.
10003 Woodloch Forest Drive
The Woodlands, TX 77380, USA
Tel.: +1 888 564 9318
Fax: +1 281 719 4047

Asia Pacific & India

Huntsman Advanced Materials
(Guangdong) Co., Ltd.
Shanghai Branch Office
455 Wenjing Road, Minhang District
Shanghai 200245, P.R. China
Tel: +86 21 3357 6588
Fax: +86 21 3357 6547



Responsible Care®
OUR COMMITMENT TO EXCELLENCE

Europe, Middle East & Africa

Huntsman Advanced Materials
(Switzerland) GmbH
Klybeckstrasse 200
P.O. Box
4002 Basel, Switzerland
Tel.: +41 61 299 1111
Fax: +41 61 299 1112